



ZEISS Axiocam 512 color

Your 12 Megapixel Microscope Camera for Imaging of Large Sample Areas







Blood smear H&E stained

Rat Bone section

Axiocam 512 color is your 12 Megapixel camera for fast high resolution imaging in true color. Capture the full color image resolution with low magnification objectives – this camera is excellent for pathology applications and large field of view color imaging.

Axiocam 512 color brings you all the fine details of your sample with unmatched color image performance and imaging speed. Be amazed with your images.

True Color with Fast Performance

Paired with easy to use ZEN software, you'll be capturing brilliant true color images like never before. An on chip RBG color mask plus innovative high speed color interpolation algorithms allow fast imaging and no delays while focusing your sample. All of this while delivering crisp 12 Megapixel images.

The huge Axiocam 512 color 16 millimeter diagonal sensor can capture large areas of your sample with each snap allowing you to rapidly collect tiled images of slides or pair with a low magnification objective to collect entire samples in a single snap. Camera binning and Region of Interest (ROI) modes offer the option for even faster acquisitions. The selectable Black & White mode allows surprising performance with fluorescently labeled samples.

Highlights

- 12 Megapixel CCD chip sensor
- Fast Quad-Port readout for 10 full frame images per second
- Small 3.1 micron pixels for optimal low magnification resolution
- Easy USB 3.0 connection
- Both color and black & white imaging modes
- Compatible with all ZEISS microscope stands
- Fast and efficient operation with ZEN Software






ZEISS Axiocam 512 color

Your 12 Megapixel Microscope Camera for Imaging of Large Sample Areas

Sensor Model	Sony ICX 834, EXview HAD CCD II ™		
Sensor Pixel Count	12 Megapixel: 4250 (H) × 2838 (V)		
Pixel size	3.1 µm x 3.1 µm		
Sensor size	Effective sensor size: 13,2 mm x 8.8 mm; image diagonal 16 mm, equivalent to 1" sensor format		
Spectral Range	Approx. 400 nm - 720 nm, coated Hoya C5000 IR Cut Filter; RGB Bayer color filter mask		
Range of integration time	250 µs to 60 s		
Live image	>10 frames/s at max @ 4248 x 2832 pixels		
Read-out mode	Quad-Port Readout		
Digitization	14 Bit / Pixel		
Interfaces	USB 3.0 SuperSpeed (5 Gbit/s)		
Optical interface	C-Mount (17.5 mm)		
Size (W x H x D) / Weight	10.8 cm x 4.3 cm x 7.8 cm / 500 g		
Power supply	Max. 7 W power consumption power by USB 2.0 and USB 3.0-Bus from PC		
Max Full Well Capacity (typical)	9.000 e-		
Readout Noise (typical)	6.8 e- at 39 Mhz; 6.5 e- at 13 Mhz		
Cooling	Regulated thermoelectric cooling (power supplied through USB 2.0 ports) Cap sensor temperature 23 °C		
Order number	426560-9000-000		

4248 x 2832	Color/	10
	Mono	
2120 x 1416	Mono	19
1416 x 944	Color/ Mono	26
1056 x 708	Mono	31
848 x 564	Color/ Mono	35
1936 x 1080	Color/ Mono	22
1936 x 512	Color/ Mono	36
	1056 x 708 848 x 564 1936 x 1080	Mono 1056 x 708 Mono 848 x 564 Color/ Mono 1936 x 1080 Color/ Mono 1936 x 512 Color/ Mono



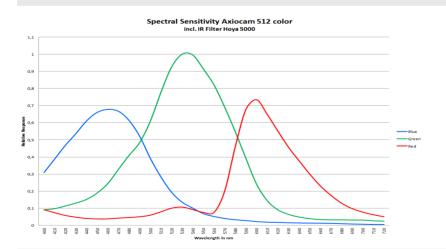



EN_40_012_106 | CZ 08-2016 | Design, scope of delivery and technical progress subject to change without notice. | © Carl Zeiss Microscopy GmbH



